

Test Report

No.: SDHL1704007535FT

Date: May 02, 2017

Page 1 of 4

ENOVA ORIGINAL FURNITURE CO., LTD.
NO.8 OF CHAOHAI ROAD, XIQING VILLAGE, LONGJIANG TOWN,
SHUNDE DISTRICT, FOSHAN CITY, GUANGDONG PROVINCE, CHINA

The following sample(s) was / were submitted and identified on behalf of the client as:

Sample Description : SNOUT SERIES CHAIR
Style / Item No. : ESN-001C
Buyer : ENOVA ORIGINAL FURNITURE CO., LTD.
Manufacturer : FOSHAN SITZONE FURNITURE CO., LTD.
Supplier : FOSHAN SITZONE FURNITURE CO., LTD.
Country of Destination : USA
Sample Receiving Date : Apr.25, 2017
Test Performing Date : Apr.25, 2017 to May 02, 2017

Test Result Summary

Test(s) Requested	Result(s)
Clause 6, 7 & 11 of ANSI/BIFMA X5.1-2017	PASS

Summary:

1. For further details, please refer to the following page(s).

Signed for and on behalf of
Shunde Branch
SGS-CSTC Co., Ltd.



Bill Wang
Approved signatory



SGS-CSTC Inspection & Testing Services Co., Ltd.
Shunde Branch Harbin

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/F, 1st Building, European Industrial Park, No.1 Shunde South Road, Wusha Section, Daliang Town, Shunde, Foshan, Guangdong, China 528333 t (86-757)22805888 f (86-757)22805858 www.sgsgroup.com.cn
中国·广东·佛山市顺德区大良街道办事处五沙顺和南路1号欧洲工业园一号厂房首层 邮编: 528333 t (86-757)22805888 f (86-757)22805858 e sgs.china@sgs.com

TESTS AND RESULTS

Test Conducted:

Clause 6, 7 & 11 of ANSI/BIFMA X5.1-2017 General-Purpose Office Chairs – Tests.

No. of Sample:

1 piece (Sample 1). For more sample information and pictures, please refer to the following page.

Test and Requirements	Test Results
6 Backrest Strength Test - Static - Type III	
<p>6.4.1 Functional Load There shall be no loss of serviceability to the chair when 667 N (150 lbf.) is applied to the backrest at the specified position for one (1) minute. With the backrest at its back stop position, apply a force that is initially 90 degrees ± 10 degrees to the plane of the backrest. The force is not intended to be maintained at 90 degrees ± 10 degrees throughout the loading of the backrest.</p>	PASS
<p>6.4.2 Proof Load There shall be no sudden and major change in the structural integrity of the chair, loss of serviceability is acceptable, when 1001 N (225 lbf.) is applied to the backrest at the specified position for one (1) minute. With the backrest at its back stop position, apply a force that is initially 90 degrees ± 10 degrees to the plane of the backrest. The force is not intended to be maintained at 90 degrees ± 10 degrees throughout the loading of the backrest.</p>	PASS
7 Drop Test - Dynamic	
<p>7.4.1 Functional Load Test There shall be no loss of serviceability when a test bag weighing 102 kg (225 lb.) is free fell from 152 mm (6 in.) above the uncompressed seat to the specified position on seat. Remove the bag, and set height to its lowest position and repeat the test for chairs with seat height adjustment features.</p>	PASS
<p>7.4.2 Proof Load Test There shall be no sudden and major change in the structural integrity of the chair. Loss of serviceability is acceptable when a test bag weighing 136 kg (300 lb.) is free fell from 152 mm (6 in.) above the uncompressed seat to the specified position on seat. Remove the bag, and set height to its lowest position and repeat the test for chairs with seat height adjustment features.</p>	PASS
11 Stability Tests	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test and Requirements	Test Results
<p>11.3.1 Rear Stability Test for Type III Chairs Place a support fixture made of a 1.5 mm ± 0.15 mm (0.060 in. ± 0.006 in.) thick polypropylene, 356 mm (14 in.) wide and 711 mm (28 in.) tall against the chair back so that it approximates the contour of the back. Load the chair with 6 disks (10 kg each). Place the first disk on the seat using the Template from Appendix G. As each disk is added to the stack slide it along the lower disk until it contacts the support fixture. Apply a rearward force parallel to the top surface of the highest disk. The location of the force application is 6 mm (0.25 in.) from the top of the disk. For chairs with seat height (as measured at the front of the bottom of the lowest disk when all disks are in the chair) less than 710 mm (28.0 in.), calculate the force as follows:</p> <ul style="list-style-type: none"> • $F = 0.1964 (1195 - H)$ Newton. H is the seat height in mm. • $[F = 1.1 (47 - H)$ pounds force.]. H is the seat height in inches. <p>For chairs with seat height equal to or greater than 710 mm (28.0 in.), a fixed force of 93 N (20.9 lbf.) shall be applied. The chair shall not tip over.</p>	<p>PASS</p>
<p>11.3.2 Rear Stability Test for Type I and II Chairs Place a support fixture made of a 1.5 mm ± 0.15 mm (0.060 in. ± 0.006 in.) thick polypropylene, 356 mm (14 in.) wide and 711 mm (28 in.) tall against the chair back so that it approximates the contour of the back. Load the chair with 13 disks. Place the first disk on the seat using the Template from Appendix G. As each disk is added to the stack slide it along the lower disk until it contacts the support fixture. If the chair does not tip over and the tilt mechanism does not tilt to its most rearward position (i.e., at its tilt stop) when the disks are placed in the chair, the chair shall also be tested according to 11.3.1 with the chair in the unlocked position. The chair shall not tip over.</p>	<p>N/A</p>
<p>11.4 Front Stability <u>Test Procedure</u> Apply a vertical load of 61kg (135 lbf.), through a 200 mm (7.87 in.) diameter disk, the center of which is 60 mm (2.4 in.) from the front center edge of the load-bearing surface of the seat. Apply a horizontal force of 20 N (4.5 lbf.) at the same height that the vertical force is applied. The force shall be coincident with the side-to-side centerline of the seat. <u>Test Procedure - Alternate</u> This alternate method may be used on chairs that have a seat surface that will support the stability loading fixture without the use of the front-stability loading disk(i.e., hard surfaced seats or seats with minimal cushion). Apply a vertical load of 61kg (135 lbf.), by means of the front stability loading fixture at a point 60 mm (2.4 in.) from the front center edge of the load-bearing surface of the chair. Apply a horizontal force of 20 N (4.5 lbf.) at the same height that the vertical force is applied. The force shall be coincident with the side-to-side centerline of the seat. The chair shall not tip over as the result of the force application.</p>	<p>PASS</p>

Remark:

1. N/A – Not applicable; N/R – Not Requested; N/P – Not provided.
2. For the sample information and pictures, please refer to the following page.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
1F, 1 Building European Industrial Park, No.1 Shunde South Road, Wusha Section, Daliang Town, Shunde, Foshan, Guangdong, China 528333 t (86-757)22805888 f (86-757)22805858 www.sgsgroup.com.cn
中国·广东·佛山市顺德区大良街道办事处五沙顺和南路1号欧洲工业园一号楼首层 邮编: 528333 t (86-757)22805888 f (86-757)22805858 e sgs.china@sgs.com


SAMPLE INFORMATION AND PICTURES

Weight: 8.65 kg

Overall Dimensions: 505 mm L x 570 mm W x 820 mm H

Other Dimensions: /

Sample as Received

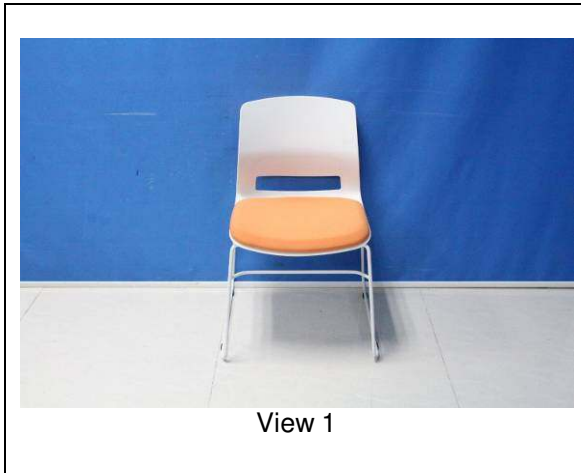

View 1



View 2



View 3



View 4

End of Report

